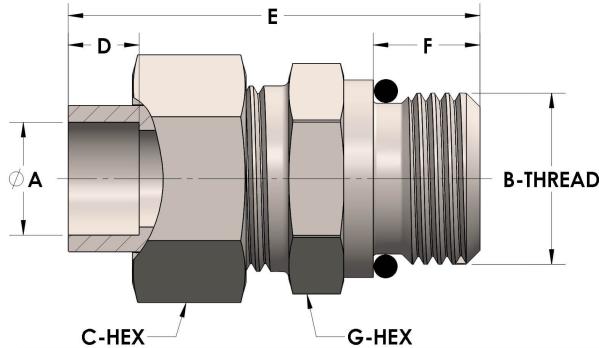


Product Category
Part Description

 H859-06-10-S
 Tube to Male Straight Thread Union Assembly

DIMENSIONS

| | |
|----------|---------------|
| A | 0.380 |
| B-THREAD | .875" - 14UNF |
| C-HEX | 1.13 |
| D | 0.250 |
| E | 1.94 |
| G-HEX | 1.06 |

GENERAL

| | |
|-------------------|--|
| Pressure Rating | 6000 PSI |
| Assembly Material | Carbon Steel, ASTM A108 |
| O-Ring Material | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket |
| Connection 1 Size | 3/8" Tube O.D. (-06) |
| Connection 2 Type | Male Straight Thread |
| Connection 2 Size | .875" - 14UNF (-10) |

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.