

H859-12-12-SS316L


American Engineering Trusted Wordwide<sup>®</sup>

# CERV

H859-12-12-SS316L 05/09/2025 2:40 AM

### **Product Category**

Part Description

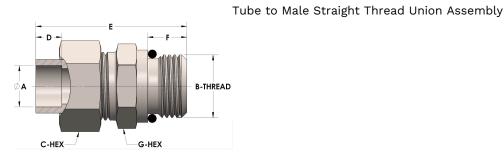

## **DIMENSIONS**

| Α        | 0.750         |
|----------|---------------|
| B-THREAD | 1.063" - 12UN |
| C-HEX    | 1.38          |
| D        | 0.440         |
| E        | 2.31          |
| F        | 0.63          |
| G-HEX    | 1.38          |

## **GENERAL**

| Pressure Rating   | 6000 PSI   |
|-------------------|--|
| Assembly Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material   | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket                                 |
| Connection 1 Size | 3/4" Tube O.D. (-12)                               |
| Connection 2 Type | Male Straight Thread                               |
| Connection 2 Size | 1.063" - 12UN (-12)                                |

#### https://www.cpvmfg.com 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the totabystem design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.