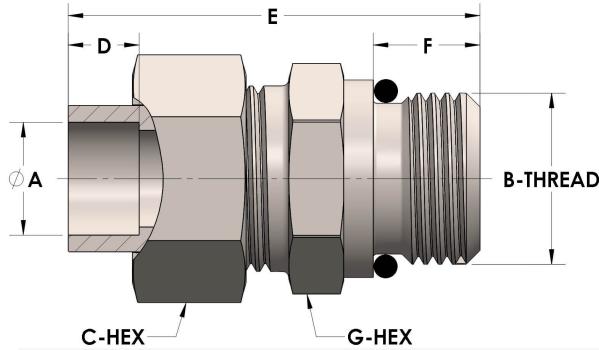


**Product Category**  
**Part Description**

 H859-20-20-S  
 Tube to Male Straight Thread Union Assembly

**DIMENSIONS**

A	1.250
B-THREAD	1.625" - 12UN
C-HEX	2
D	0.560
E	2.69
G-HEX	1.88

**GENERAL**

Pressure Rating	3000 PSI
Assembly Material	Carbon Steel, ASTM A108
O-Ring Material	Viton® Fluorocarbon Type 1, Class 2 (90 durometer)
Connection 1 Type	Female Tube Socket
Connection 1 Size	1.25" Tube O.D. (-20)
Connection 2 Type	Male Straight Thread
Connection 2 Size	1.625" - 12UN (-20)

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.