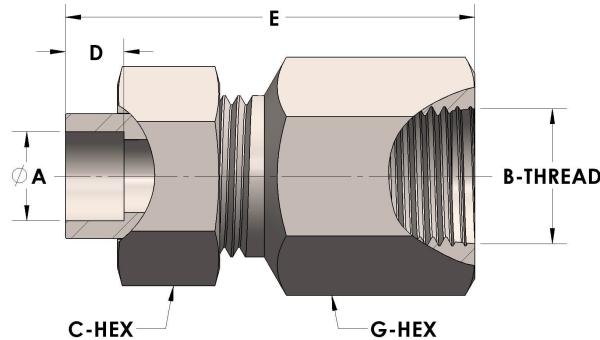


Product Category
 Part Description

 H864-02-04-SS316L
 Tube to Female Straight Thread Union Assembly

DIMENSIONS

A	0.130
B-THREAD	.438" - 20UINF
C-HEX	0.63
D	0.190
E	1.50
G-HEX	0.75

GENERAL

Pressure Rating	6000 PSI
Assembly Material	316/L Stainless Steel, ASTM A276, UNS S31600/03
O-Ring Material	Viton® Fluorocarbon Type 1, Class 2 (90 durometer)
Connection 1 Type	Female Tube Socket
Connection 1 Size	1/8" Tube O.D. (-02)
Connection 2 Type	Female Straight Thread
Connection 2 Size	.438" - 20UINF (-04)

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.