




Product Category
Part Description

H865-32-32-CUNI
Direct Weld/Braze Insert (Male Pipe X Tube SW)

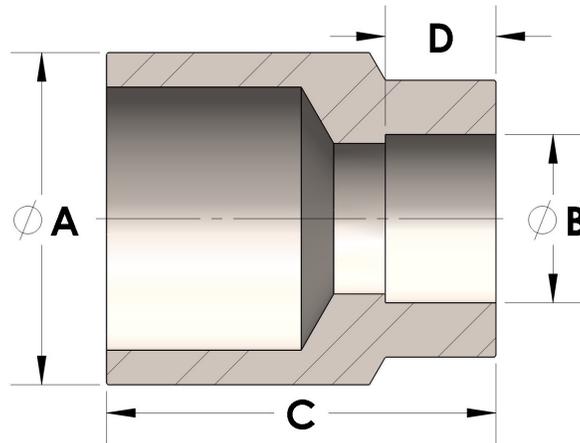

DIMENSIONS

| | |
|---|-------|
| A | 2.375 |
| B | 2.00 |
| C | 2.38 |
| D | 0.880 |

GENERAL

| | |
|------------------|--|
| Pressure Rating | 2000 PSI |
| Fitting Material | Copper Nickel 70/30, MIL-C--15726F, UNS C71500 |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.