




**Product Category**  
**Part Description**

H890-24-SS316L  
Socketweld/braze Tube Bulkhead Union Assembly

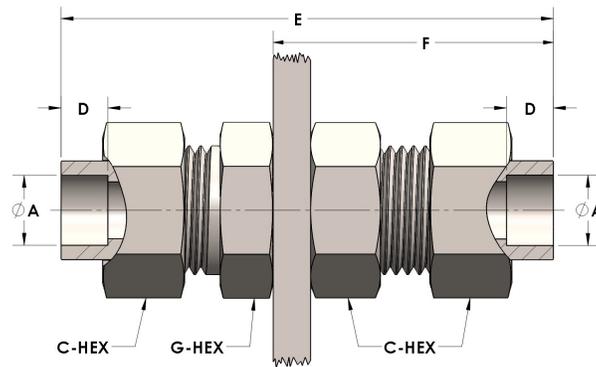

## DIMENSIONS

|                 |       |
|-----------------|-------|
| A               | 1.500 |
| C-HEX           | 2.38  |
| D               | 0.630 |
| E               | 4.38  |
| F               | 2.38  |
| G-HEX           | 2.25  |
| PANEL BORE DIA. | 2.19  |

## GENERAL

|                   |  |
|-------------------|--|
| Pressure Rating   | 3000 PSI   |
| Assembly Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03    |
| O-Ring Material   | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket                                 |
| Connection 1 Size | 1.50" Tube O.D. (-24)                              |
| Connection 2 Type | Female Tube Socket                                 |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.