




**Product Category**

**Product Line**

**Part Description**

G0NGPS-02-NO

FloMaster® Actuated G-Series® Needle Valves (G-N Series)  
Globe Needle Actuated Valve, Socketweld Pipe Ends, Normally Open

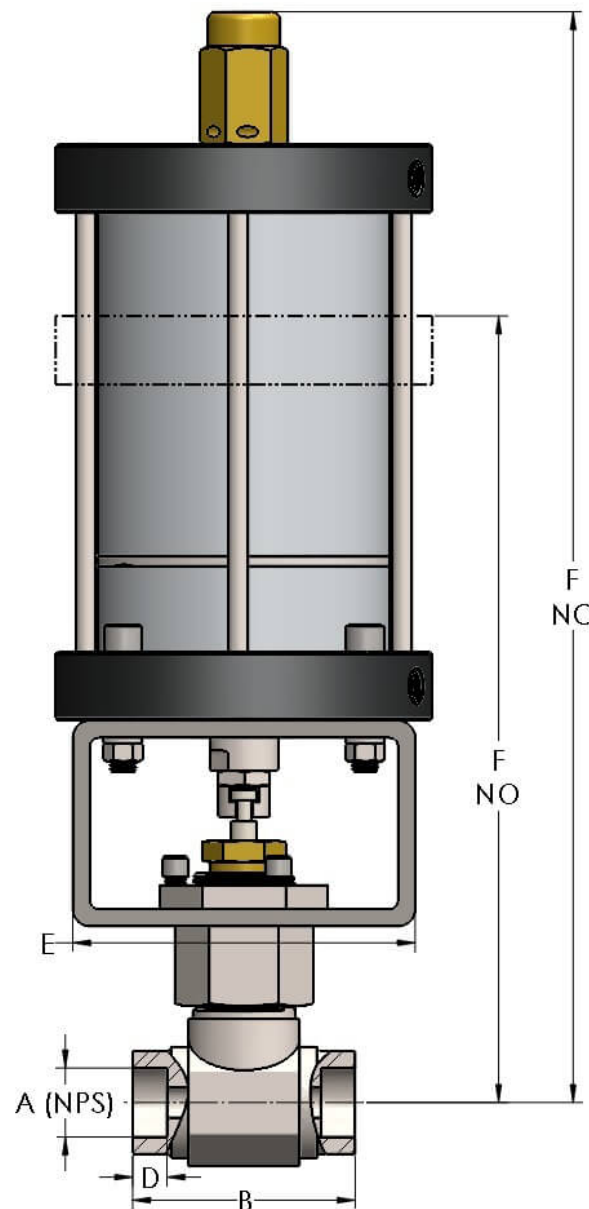

## DIMENSIONS

Orifice

0.218

A (NPS)	0.405
B	2.38
D	0.380
E	4.00
F (Normally Open)	6.19
F (Normally Closed)	10.63

## GENERAL

Pressure Rating	6000 PSI
Temperature Range	-15°F to 400°F (-26°C to 204°C)
Standard Soft Goods	[-G] Polyurethane® Packing and Viton® O-Rings
Cartridge Type	Needle
Connection Type	Socketweld Pipe
Connection Size	1/8"
Body Material	316/L Stainless Steel, ASTM A182, UNS S31603
Bonnet Material	316/L Stainless Steel, ASTM A276, UNS S31603

## OPTIONS

[-VC] Vacuum Service	Option to add additional softgoods for internal vacuum service.
Optional Soft Goods	[-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings