



**Product Category**


17D-D-B-R

**Product Line**

Air Check Valves (14D, 15D, 16D, 17D, 125D, 126D)

**Part Description**

CLASS 300 Flange Style Silent Air Check Valve with Bronze Body and Bronze Trim

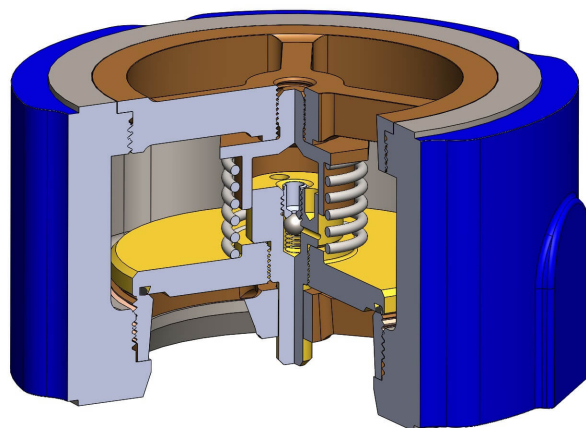

## DIMENSIONS

|                     |       |
|---------------------|-------|
| Face to Face        | 4     |
| Dia. of Bolt Circle | 7.88  |
| Dia. of Flange      | 10.00 |
| No. of Studs        | 8     |
| Dia. of Studs       | 0.75  |
| Length of Studs     | 9.50  |
| Weight (lbs.)       | 24    |

## GENERAL

|                     |                                    |
|---------------------|------------------------------------|
| Pressure Rating     | up to 750 PSI                      |
| Temperature Range   | -30°F to 250°F (-34°C to 121°C)    |
| Standard Soft Goods | Buna-N O-Rings                     |
| Cartridge Type      | Air Check                          |
| Connection Type     | ANSI B16.5 Flange                  |
| Connection Size     | 4"                                 |
| Body Material       | Valve Bronze, ASTM B61, UNS C92200 |

## OPTIONS

**Port & Vent Options**

[-DP] Drain Plug Above Seat (1/2" NPT)

**Optional Soft Goods**

Viton® O-Rings, EPDM O-Rings

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.