

Product Category


115D-A-SS-R

Product Line

Steel Flanged Check Valves (110D, 111D, 113D, 114D, 115D)

Part Description

CLASS 1500 Flange Style Silent Check Valve with Steel Body and Stainless Steel Trim

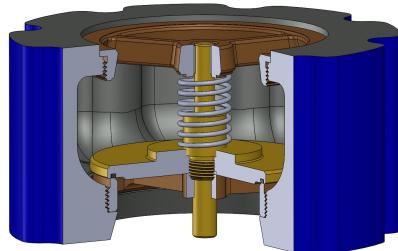

DIMENSIONS

Face to Face	2.63
Dia. of Bolt Circle	6.5
Dia. of Flange	8.5
No. of Studs	8
Dia. of Studs	0.88
Length of Studs	10.5
Weight (lbs.)	16

GENERAL

Pressure Rating	1500 PSI
Temperature Range	-30°F to 250°F (-34°C to 121°C)
Standard Soft Goods	Buna-N O-Rings
Cartridge Type	Check
Connection Type	ANSI B16.5 Flange
Connection Size	2"
Body Material	Carbon Steel, ASTM A216, WCB, UNS J03002

OPTIONS

[-P] Port & Vent Options	[-DP] Drain Plug Above Seat (3/8" NPT)
Optional Soft Goods	Viton® O-Rings, EPDM O-Rings

<http://cpv.stage.demotesturl.net> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.