

**Product Category**

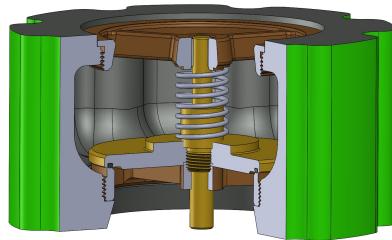
11D-B-SS-R

**Product Line**

Cast Iron &amp; Bronze Flanged Check Valves (10D, 11D, 12D, 13D, 20D, 21D)

**Part Description**

CLASS 250 Flange Style Silent Check Valve with Cast Iron Body and Stainless Steel Trim


**DIMENSIONS**

<b>Face to Face</b>	2.88
<b>Dia. of Bolt Circle</b>	5.88
<b>Dia. of Flange</b>	7.5
<b>No. of Studs</b>	8
<b>Dia. of Studs</b>	0.75
<b>Length of Studs</b>	7
<b>Weight (lbs.)</b>	12

**GENERAL**

<b>Pressure Rating</b>	250 PSI
<b>Temperature Range</b>	-30°F to 250°F (-34°C to 121°C)
<b>Standard Soft Goods</b>	Buna-N O-Rings
<b>Cartridge Type</b>	Check
<b>Connection Type</b>	ANSI B16.5 Flange
<b>Connection Size</b>	2.5"
<b>Body Material</b>	Cast Iron, ASTM A126, CL. B

**OPTIONS**

<b>[ -P ] Port &amp; Vent Options</b>	[ -DP ] Drain Plug Above Seat (3/8" NPT)
<b>Optional Soft Goods</b>	Viton® O-Rings, EPDM O-Rings

<http://cpv.stage.demotesturl.net> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.