

Product Category


123A-3

Product Line

O-SEAL® In-Line Check Valves (123A Series)

Part Description

1/2" In-Line Check Valve with O-SEAL® Ends

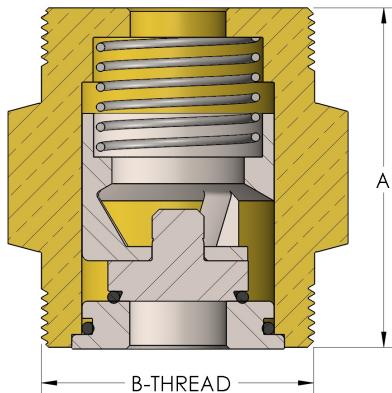

DIMENSIONS

Port Dia.	0.5
A	2.00
B-THREAD	1.750"-12UN
CRN	0C17716.2

GENERAL

Pressure Rating	6000 PSI
Temperature Range	-15°F to 400°F (-26°C to 204°C)
Standard Soft Goods	[-C] Viton® O-Rings
Cartridge Type	Check
Connection Type	O-SEAL® Union Thread
Connection Size	1/2"
CRN	0C17716.2

OPTIONS

Optional Soft Goods	[-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings
----------------------------	---

<http://cpv.stage.demotesturl.net> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.