

**Product Category**


125D-E-B-R

**Product Line**

Air Check Valves (14D, 15D, 16D, 17D, 125D, 126D)

**Part Description**

CLASS 150 Flange Style Silent Air Check Valve with Steel Body and Bronze Trim

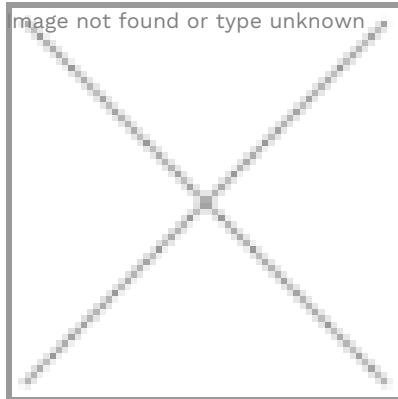

## DIMENSIONS

<b>Face to Face</b>	4.63
<b>Dia. of Bolt Circle</b>	8.50
<b>Dia. of Flange</b>	10.00
<b>No. of Studs</b>	8
<b>Dia. of Studs</b>	0.75
<b>Length of Studs</b>	9.50
<b>Weight (lbs.)</b>	45

## GENERAL

<b>Pressure Rating</b>	150 PSI
<b>Temperature Range</b>	-30°F to 250°F (-34°C to 121°C)
<b>Standard Soft Goods</b>	Buna-N O-Rings
<b>Cartridge Type</b>	Air Check
<b>Connection Type</b>	ANSI B16.5 Flange
<b>Connection Size</b>	5"
<b>Body Material</b>	Carbon Steel, ASTM A216, WCB, UNS J03002

<https://www.cpvmfg.com> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.



## OPTIONS

### Port & Vent Options

[-DP] Drain Plug Above Seat (3/4" NPT)

### Optional Soft Goods

Viton® O-Rings, EPDM O-Rings

<https://www.cpvmfg.com> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.