



Part Number:


1380-0-NC

Product Line:

FloMaster® Actuated O-SEAL® Shutoff Valve (1300 Series)

Part Description:

1/8" Globe Shutoff Actuated Valve, O-SEAL® Ends, Normally Closed

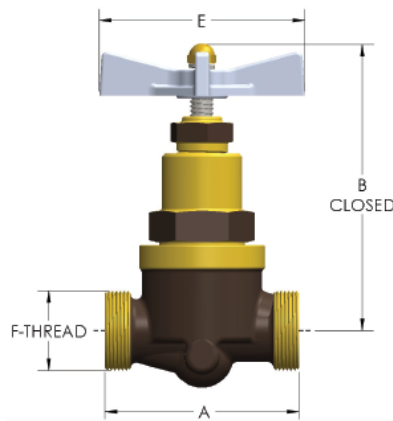

DIMENSIONS

Port Dia.:	0.22
A:	2.75
D-THREAD :	1.000"-14UNS
E:	4
F (Normally Closed):	11.5

GENERAL

Pressure Rating:6000 PSI
Temperature Range:-15°F to 400°F (-26°C to 204°C)
Standard Soft Goods: [-G] Polyurethane® Packing and Viton® O-Rings
Cartridge Type: Shutoff
Connection Type: O-SEAL® Union Thread
Connection Size: 1/8"
Body Material: Nickel Aluminum Bronze, ASTM B148, UNS C95800
Bonnet Material: Nickel Aluminum Bronze, ASTM B150, UNS C63200
CRN: 0C17716.2



Options

[-VC] Vacuum Service: Option to add additional softgoods for internal vacuum service.

Port & Vent Options: [-PA] Port Above Seat (1/8" NPT), [-PB] Port Below Seat (1/8" NPT), '[-VA] Vent Above Seat (3/8"-24 SAE), [-VB] Vent Below Seat (3/8"-24 SAE),

Optional Soft Goods: [-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings