

Part Number:


1380-0-P-OXNB-VC-NC

Product Line:

FloMaster® Actuated OXNB Shutoff Valve (1300 Series)

Part Description:

1/8" Globe Shutoff Oxygen Actuated Valve, Normally Closed

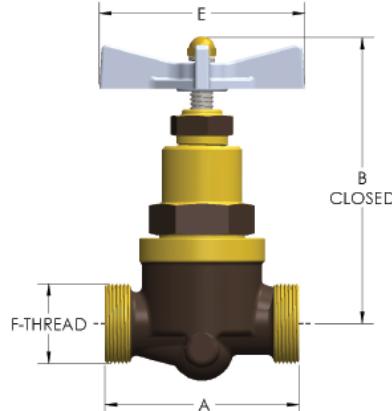

DIMENSIONS

Port Dia.:	0.22
A:	2.75
D-THREAD :	1.000"-14UNS
F :	4.13
J (Normally Closed):	11.5

GENERAL

Pressure Rating:	4500 PSI
Temperature Range:	-15°F to 400°F (-26°C to 204°C)
Standard Soft Goods:	[-C] Viton® Packing & O-Rings
Cartridge Type:	Shutoff
Connection Type:	O-SEAL® Union Thread
Connection Size:	1/8"
Body Material:	Naval Brass, ASTM B21, UNS C46400
Bonnet Material:	Naval Brass, ASTM B21, UNS C46400
CRN:	0C16868.2

<http://cpv.stage.demotesturl.net 484.731.4010>

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.



Options

[-P] Port & Vent Options:

[-PA] Port Above Seat (1/8" NPT), [-PB] Port Below Seat (1/8" NPT), [-VA] Vent Above Seat (3/8"-24 SAE), [-VB] Vent Below Seat (3/8"-24 SAE),

<http://cpv.stage.demotesturl.net> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.