

Part Number:


1380-1-P-OXNB-VC-NC

Product Line:

FloMaster® Actuated OXNB Shutoff Valve (1300 Series)

Part Description:

1/4" Globe Shutoff Oxygen Actuated Valve, Normally Closed

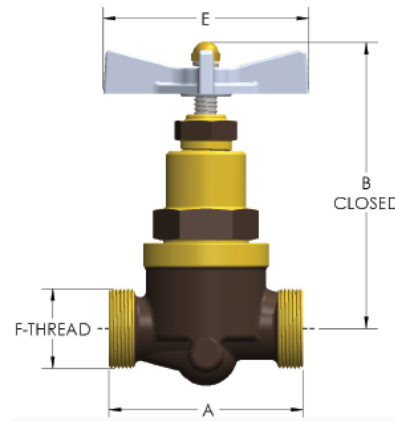

DIMENSIONS

Port Dia.:	0.31
A:	3.38
CRN :	0C16868.2
D-THREAD :	1.188"-12UN
F :	5.5
J (Normally Closed):	13.44
K :	4



GENERAL

Pressure Rating:	4500 PSI
Temperature Range:	-15°F to 400°F (-26°C to 204°C)
Standard Soft Goods:	[-C] Viton® Packing & O-Rings
Cartridge Type:	Shutoff
Connection Type:	O-SEAL® Union Thread
Connection Size:	1/4"
Body Material:	Naval Brass, ASTM B21, UNS C46400
Bonnet Material:	Naval Brass, ASTM B21, UNS C46400
CRN:	OC16868.2

Options

[-P] Port & Vent Options:	[-PA] Port Above Seat (1/8" NPT), [-PB] Port Below Seat (1/8" NPT), '[-VA] Vent Above Seat (3/8"-24 SAE), [-VB] Vent Below Seat (3/8"-24 SAE),
---------------------------	--