




**Part Number:**  
1380-2-P-OXNB-VC-NC

**Product Line:**  
FloMaster® Actuated OXNB Shutoff Valve (1300 Series)

**Part Description:**  
3/8" Globe Shutoff Oxygen Actuated Valve, Normally Closed

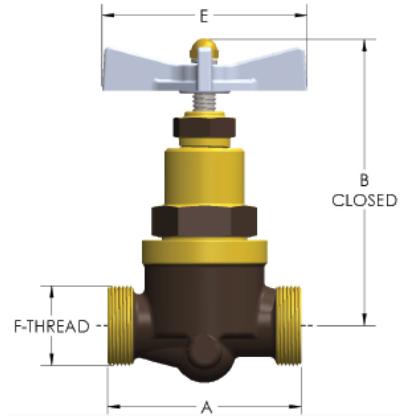

## DIMENSIONS

<b>Port Dia.:</b>	0.44
<b>A:</b>	4

## GENERAL

**Pressure Rating:** 4500 PSI

**Temperature Range:** -15°F to 400°F (-26°C to 204°C)

**Port and Vent Options:** [-PA] Port Above Seat (1/8" NPT), [-PB] Port Below Seat (1/8" NPT), [-VA] Vent Above Seat (3/8"-24 SAE), [-VB] Vent Below Seat (3/8"-24 SAE),

**Standard Soft Goods:** [-C] Viton® Packing & O-Rings

**Cartridge Type:** Shutoff

**Connection Type:** O-SEAL® Union Thread

**Connection Size:** 3/8"

**Body Material:** O-SEAL® Globe

**Bonnet Material:** Naval Brass, ASTM B21, UNS C46400

**CRN:** 0C16868.2

<http://cpv.stage.demotesturl.net> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.