

Part Number:


1380-5-NC

Product Line:

FloMaster® Actuated O-SEAL® Shutoff Valve (1300 Series)

Part Description:

1.00" Globe Shutoff Actuated Valve, O-SEAL® Ends, Normally Closed

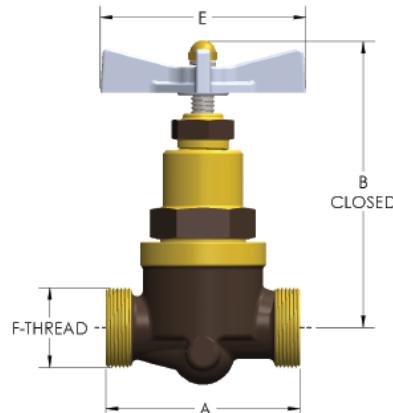

DIMENSIONS

Port Dia.:	0.81
A:	5.25
CRN :	0C17716.2
D-THREAD :	2.313"-12UNS
E:	8
F (Normally Closed):	16.75

<http://cpv.stage.demotesturl.net 484.731.4010>

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.



GENERAL

Pressure Rating:	6000 PSI
Temperature Range:	-15°F to 400°F (-26°C to 204°C)
Standard Soft Goods:	[-G] Polyurethane® Packing and Viton® O-Rings
Cartridge Type:	Shutoff
Connection Type:	O-SEAL® Union Thread
Connection Size:	1.00"
Body Material:	Nickel Aluminum Bronze, ASTM B148, UNS C95800
Bonnet Material:	Nickel Aluminum Bronze, ASTM B148/B150, UNS C95800/C63200
CRN:	0C17716.2

Options

[-VC] Vacuum Service:	Option to add additional softgoods for internal vacuum service.
[-P] Port & Vent Options:	[-PA] Port Above Seat (1/4" NPT), [-PB] Port Below Seat (1/4" NPT), [-VA] Vent Above Seat (1/2"-13 SAE), [-VB] Vent Below Seat (1/2"-13 SAE),
Optional Soft Goods:	[-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings