

Product Category


1381-5-NC

Product Line

FloMaster® Actuated O-SEAL® Shutoff Valve (1300 Series)

Part Description

1.00" Angle Shutoff Actuated Valve, O-SEAL® Ends, Normally Closed

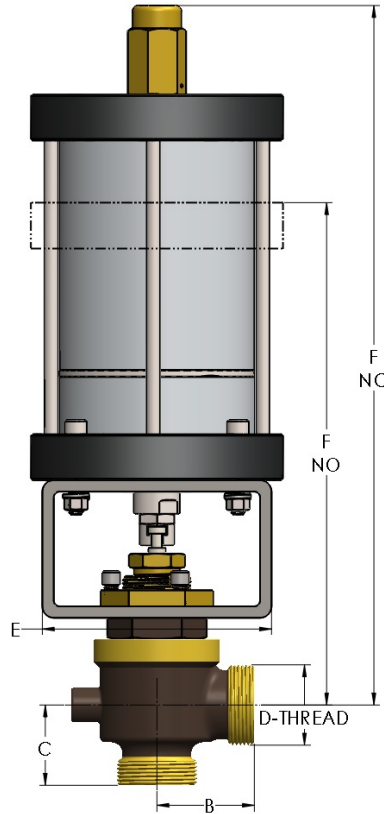

## DIMENSIONS

|                     |              |
|---------------------|--------------|
| Port Dia.           | 0.81         |
| B                   | 2.63         |
| C                   | 2.75         |
| CRN                 | OC17716.2    |
| D-THREAD            | 2.313"-12UNS |
| E                   | 8.00         |
| F (Normally Closed) | 16.75        |



## GENERAL

|                     |                                                           |
|---------------------|-----------------------------------------------------------|
| Pressure Rating     | 6000 PSI                                                  |
| Temperature Range   | -15°F to 400°F (-26°C to 204°C)                           |
| Standard Soft Goods | [-G] Polyurethane® Packing and Viton® O-Rings             |
| Cartridge Type      | Shutoff                                                   |
| Connection Type     | O-SEAL® Union Thread                                      |
| Connection Size     | 1.00"                                                     |
| Body Material       | Nickel Aluminum Bronze, ASTM B148, UNS C95800             |
| Bonnet Material     | Nickel Aluminum Bronze, ASTM B148/B150, UNS C95800/C63200 |
| CRN                 | OC17716.2                                                 |

## OPTIONS

|                          |                                                                                                                                               |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| [-VC] Vacuum Service     | Option to add additional softgoods for internal vacuum service.                                                                               |
| [-P] Port & Vent Options | [-PA] Port Above Seat (1/4" NPT), [-PB] Port Below Seat (1/4" NPT), [-VA] Vent Above Seat (1/2"-13 SAE), [-VB] Vent Below Seat (1/2"-13 SAE), |
| Optional Soft Goods      | [-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings                                     |