

**Product Category**


150-3

**Product Line**

NPT Threaded Relief Valves (150 Series)

**Part Description**

Bronze Angle Relief Valve with Female Pipe Thread (NPT) Ends

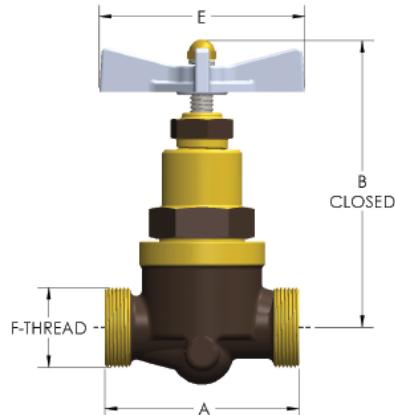

## DIMENSIONS

|                               |         |
|-------------------------------|---------|
| Overall Length                | 5.38    |
| Female Inlet and Outlet (NPT) | 1/2"-14 |
| Center of Outlet to Bottom    | 1.44    |
| Weight (lbs.)                 | 2.4     |

## GENERAL

|                     |                                    |
|---------------------|------------------------------------|
| Pressure Rating     | 300 PSI                            |
| Temperature Range   | -30°F to 250°F (-34°C to 121°C)    |
| Standard Soft Goods | Buna-N O-Rings                     |
| Cartridge Type      | Relief                             |
| Connection Type     | Female Pipe Thread (NPT)           |
| Connection Size     | 1/2"                               |
| Body Material       | Valve Bronze, ASTM B61, UNS C92200 |
| Bonnet Material     | Naval Brass, ASTM B21, UNS C46400  |

## OPTIONS

|                     |                              |
|---------------------|------------------------------|
| Optional Soft Goods | Viton® O-Rings, EPDM O-Rings |
|---------------------|------------------------------|

<http://cpv.stage.demotesturl.net> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.