

**Product Category**


157A-0.313-

**Product Line**

O-SEAL® Full Size Relief Valves (157A Series)

**Part Description**

Angle Relief Valve with -3 x -6 O-SEAL® Ends

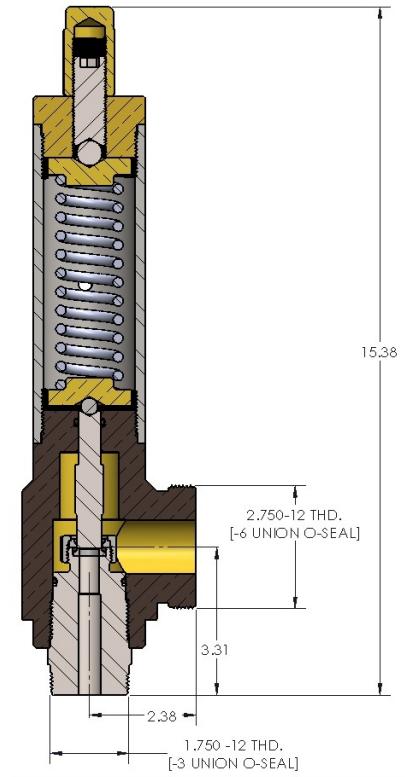

## DIMENSIONS

## GENERAL

<b>Pressure Rating</b>	Range: 400 PSI to 3500 PSI
<b>Temperature Range</b>	-15°F to 400°F (-26°C to 204°C)
<b>Standard Soft Goods</b>	Viton® O-Rings
<b>Cartridge Type</b>	Relief
<b>Connection Type</b>	O-SEAL® Union Thread
<b>Connection Size</b>	-3 x -6
<b>Body Material</b>	Nickel Aluminum Bronze, ASTM B148, UNS C95800
<b>Bonnet Material</b>	Naval Brass, ASTM B21, UNS C46400

<https://cpv.stage.demotesturl.net> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.



## OPTIONS

### Optional Soft Goods

Buna-N O-Rings, EPDM O-Rings

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.