

Product Category


34-3

Product Line

NPT Threaded Check Valves (34, 36, 37 Series)

Part Description

Steel Body In-line Silent Check Valve with Female Pipe Thread (NPT) Ends

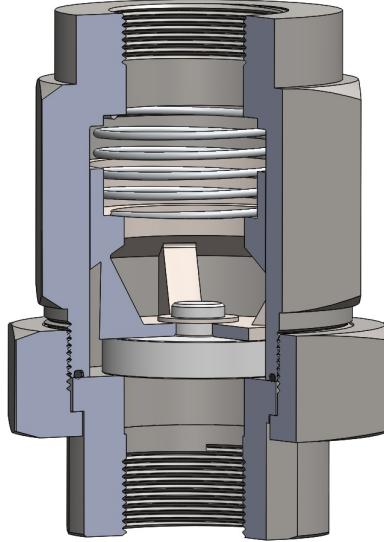

DIMENSIONS

| | |
|-------------------------------|---------|
| End to End | 3.94 |
| Female Inlet and Outlet (NPT) | 1/2"-14 |
| Weight (lbs.) | 2 |

GENERAL

| | |
|---------------------|--|
| Pressure Rating | 300 PSI |
| Temperature Range | -30°F to 250°F (-34°C to 121°C) |
| Standard Soft Goods | Buna-N O-Rings and Nylon Disc |
| Cartridge Type | Check |
| Connection Type | Female Pipe Thread (NPT) |
| Connection Size | 1/2" |
| Body Material | Carbon Steel, ASTM A36/A311, UNS K02600/G10180 |

<https://cpv.stage.demotesturl.net 484.731.4010>

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.



OPTIONS

Optional Soft Goods

Viton® O-Rings, EPDM O-Rings

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.