

Part Number:


380-1

Product Line:

O-SEAL® Shutoff Valves (300 Series)

Part Description:

1/4" Globe Shutoff Valve with O-SEAL® Ends

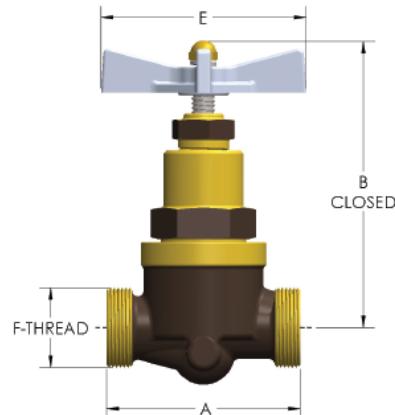

DIMENSIONS

| | |
|-------------------|-------------|
| Port Dia.: | 0.31 |
| A: | 3.38 |
| B: | 4.06 |
| CRN : | 0C17716.2 |
| E: | 3.5 |
| F-THREAD : | 1.188"-12UN |
| Lift: | 0.34 |
| Lift: | 0.34 |
| Lift: | 0.34 |

<http://cpv.stage.demotesturl.net 484.731.4010>

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.



GENERAL

| | |
|-----------------------------|---|
| Pressure Rating: | 6000 PSI |
| Temperature Range: | -15°F to 275°F (-26°C to 135°C) |
| Standard Soft Goods: | [-G] Polyurethane® Packing and Viton® O-Rings |
| Cartridge Type: | Shutoff |
| Connection Type: | O-SEAL® Union Thread |
| Connection Size: | 1/4" |
| Body Material: | Nickel Aluminum Bronze, ASTM B148, UNS C95800 |
| Bonnet Material: | Nickel Aluminum Bronze, ASTM B150, UNS C63200 |
| CRN: | 0C17716.2 |

Options

| | |
|--------------------------------------|--|
| [-VC] Vacuum Service: | Option to add additional softgoods for internal vacuum service. |
| [-P] Panel Mount: | Option to add external thread and panel mounting nut to bonnet |
| [-P] Port & Vent Options: | [-PA] Port Above Seat (1/8" NPT), [-PB] Port Below Seat (1/8" NPT), '[-VA] Vent Above Seat (3/8"-24 SAE), [-VB] Vent Below Seat (3/8"-24 SAE), |
| Optional Soft Goods: | [-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings |