

**Part Number:**


380-5-P-OXNB-VC

**Product Line:**

OXNB Shutoff Valve (300 Series)

**Part Description:**

1.00" Globe Shutoff Oxygen Hand Valve

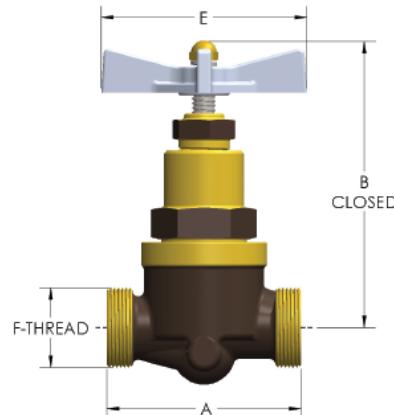

## DIMENSIONS

Port Dia.:	0.81
A:	5.25
B:	7.63
C :	7.25
CRN :	0C16868.2
D-THREAD :	2.313"-12UNS
E:	3.75
F :	7.75
Lift:	0.59
Lift:	0.59
Lift:	0.59

<http://cpv.stage.demotesturl.net 484.731.4010>

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.



## GENERAL

Pressure Rating:	4500 PSI
Temperature Range:	-15°F to 400°F (-26°C to 204°C)
Standard Soft Goods:	[-C] Viton® Packing & O-Rings
Cartridge Type:	Shutoff
Connection Type:	O-SEAL® Union Thread
Connection Size:	1.00"
Body Material:	Naval Brass, ASTM B21, UNS C46400
Bonnet Material:	Naval Brass, ASTM B21, UNS C46400
CRN:	0C16868.2

## Options

[-P] Port & Vent Options:	[-PA] Port Above Seat (1/4" NPT), [-PB] Port Below Seat (1/4" NPT), '[-VA] Vent Above Seat (1/2"-13 SAE), [-VB] Vent Below Seat (1/2"-13 SAE),
---------------------------	--