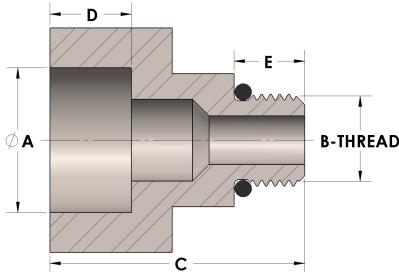


**Product Category**

45-3-08-SS316L

**Part Description**

Direct Socketweld/Braze Pipe X Male Straight Thread Adapter


**DIMENSIONS**

A	0.855
B-THREAD	.750"-16UNF
C	1.69
D	0.500
E	0.47

**GENERAL**

Pressure Rating	6000 PSI
O-Ring Material	Viton® Fluorocarbon Type 1, Class 2 (90 durometer)
Fitting Material	316/L Stainless Steel, ASTM A276, UNS S31600/03

<https://www.cpvmfg.com> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.