

Part Number:


582-3

Product Line:

O-SEAL® Stop-Check Valves (500 Series)

Part Description:

1/2" Offset Stop-Check Valve with O-SEAL® Ends

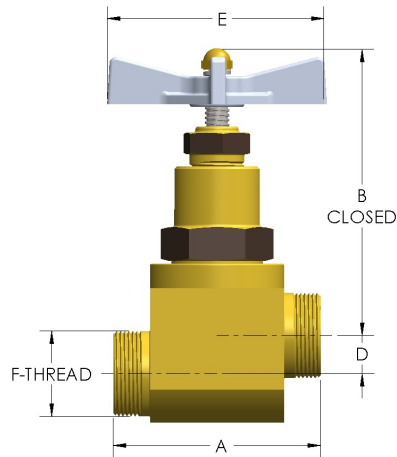

DIMENSIONS

Port Dia.:	0.5
A:	4.25
B:	6
D :	0.78
E:	4.5
F-THREAD :	1.750"-12UN
Lift:	0.53
Lift:	0.53
Lift:	0.53



GENERAL

Pressure Rating:	6000 PSI
Temperature Range:	-15°F to 275°F (-26°C to 135°C)
Standard Soft Goods:	[-G] Polyurethane® Packing and Viton® O-Rings
Cartridge Type:	Stop-Check
Connection Type:	O-SEAL® Union Thread
Connection Size:	1/2"
Body Material:	Nickel Aluminum Bronze, ASTM B150, UNS C63200
Bonnet Material:	Nickel Aluminum Bronze, ASTM B150, UNS C63200

Options

[-VC] Vacuum Service:	Option to add additional softgoods for internal vacuum service.
[-P] Panel Mount:	Option to add external thread and panel mounting nut to bonnet
[-P] Port & Vent Options:	[-PA] Port Above Seat (1/8" NPT), [-PB] Port Below Seat (1/8" NPT), '[-VA] Vent Above Seat (3/8"-24 SAE), [-VB] Vent Below Seat (3/8"-24 SAE),
Optional Soft Goods:	[-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings