


Part Number: 680-1

Product Line: O-SEAL® Check Valves (600 Series)

Part Description: 1/4" Globe Check Valve with O-SEAL® Ends

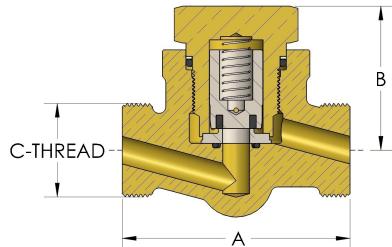

DIMENSIONS

Port Dia.:	0.31
A:	3.38
B:	2
CRN :	0C17716.2
C-THREAD :	1.188"-12UN

GENERAL

Pressure Rating:	6000 PSI
Temperature Range:	-15°F to 275°F (-26°C to 135°C)
Standard Soft Goods:	[-C] Viton® O-Rings
Cartridge Type:	Check
Connection Type:	O-SEAL® Union Thread
Connection Size:	1/4"
Body Material:	Nickel Aluminum Bronze, ASTM B148, UNS C95800
Bonnet Material:	Nickel Aluminum Bronze, ASTM B150, UNS C63200
CRN:	0C17716.2

<http://cpv.stage.demotesturl.net 484.731.4010>

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.



Options

[-P] Port & Vent Options:	[-PA] Port Above Seat (1/8" NPT), [-PB] Port Below Seat (1/8" NPT), '[-VA] Vent Above Seat (3/8"-24 SAE), [-VB] Vent Below Seat (3/8"-24 SAE),
Optional Soft Goods:	[-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings

<http://cpv.stage.demotesturl.net> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.