

**Part Number:**


G0SGPS-02-NO

**Product Line:**

FloMaster® Actuated G-Series® Needle Valves (G-N Series)

**Part Description:**

Globe Shutoff Actuated Valve, Socketweld Pipe Ends, Normally Open

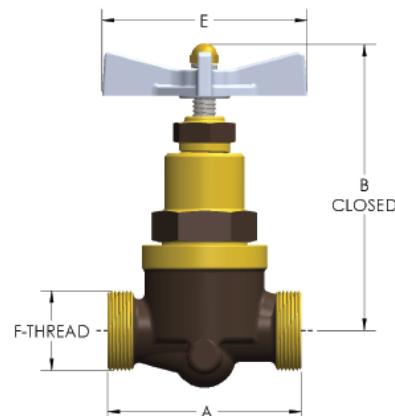

## DIMENSIONS

Orifice:	0.218
A (NPS) :	0.405
B:	2.38
D :	0.38
E:	4
F (Normally Open):	6.19
F (Normally Closed):	10.63



## GENERAL

Pressure Rating:	6000 PSI
Temperature Range:	-15°F to 400°F (-26°C to 204°C)
Standard Soft Goods:	[-G] Polyurethane® Packing and Viton® O-Rings
Cartridge Type:	Shutoff
Connection Type:	Socketweld Pipe
Connection Size:	1/8"
Body Material:	316/L Stainless Steel, ASTM A182, UNS S31603
Bonnet Material:	316/L Stainless Steel, ASTM A276, UNS S31603

## Options

[-VC] Vacuum Service:	Option to add additional softgoods for internal vacuum service.
Optional Soft Goods:	[-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings