

Part Number:


G1CGPS-06

Product Line:

G-Series® Check Valves (G-C Series)

Part Description:

Globe Check Valve with Socketweld Pipe Ends

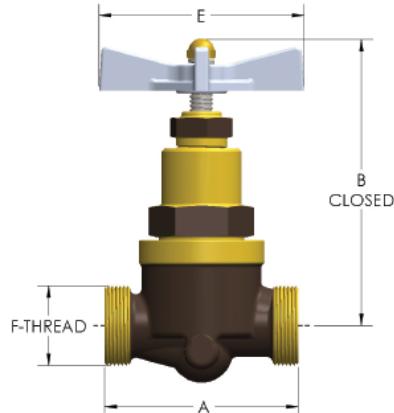

DIMENSIONS

Orifice:	0.313
A (NPS) :	0.675
B:	2.5
D :	0.38
H:	2.06

GENERAL

Pressure Rating:	6000 PSI
Temperature Range:	-15°F to 400°F (-26°C to 204°C)
Standard Soft Goods:	[-G] Polyurethane® Packing and Viton® O-Rings
Cartridge Type:	Check
Connection Type:	Socketweld Pipe
Connection Size:	3/8"
Body Material:	316/L Stainless Steel, ASTM A182, UNS S31603
Bonnet Material:	316/L Stainless Steel, ASTM A276, UNS S31603

<http://cpv.stage.demotesturl.net 484.731.4010>

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.



Options

[-VC] Vacuum Service:

Option to add additional softgoods for internal vacuum service.

Optional Soft Goods:

[-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings

<http://cpv.stage.demotesturl.net> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.