

Part Number:


G2SGPF-08-NC

Product Line:

FloMaster® Actuated G-Series® Shutoff Valves (G-S Series)

Part Description:

Globe Shutoff Actuated Valve, Female NPT Ends, Normally Closed

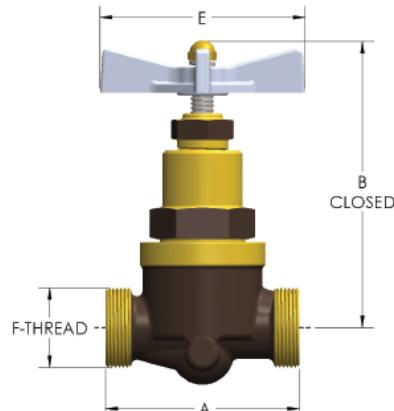

DIMENSIONS

Orifice:	0.438
A-NPT :	1/2"-14
B:	3.38
E:	5
F (Normally Open):	11.13
F (Normally Closed):	16.05

GENERAL

Pressure Rating:	6000 PSI
Temperature Range:	-15°F to 400°F (-26°C to 204°C)
Standard Soft Goods:	[-G] Polyurethane® Packing and Viton® O-Rings
Cartridge Type:	Shutoff
Connection Type:	Female Pipe Thread (NPT)
Connection Size:	1/2"
Body Material:	316/L Stainless Steel, ASTM A182, UNS S31603
Bonnet Material:	316/L Stainless Steel, ASTM A276, UNS S31603

<http://cpv.stage.demotesturl.net 484.731.4010>

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.



Options

[-VC] Vacuum Service:	Option to add additional softgoods for internal vacuum service.
Optional Soft Goods:	[-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings

<http://cpv.stage.demotesturl.net> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.