



Product Category


G5SGPF-20

Product Line

G-Series® Shutoff Valve (G-S Series)

Part Description

Globe Shutoff Valve with Female Pipe Thread (NPT) Ends

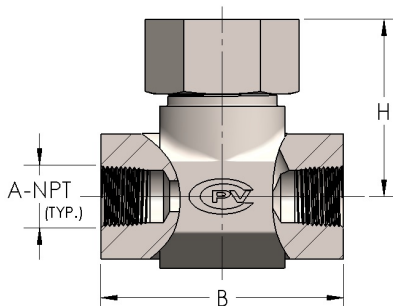

## DIMENSIONS

|          |             |
|----------|-------------|
| Orifice  | 0.813       |
| A-NPT :  | 1.250"-11.5 |
| B        | 4.75        |
| E        | 7.25        |
| F        | 7.19        |
| G        | 3.38        |
| J (max.) | 0.88        |
| K        | 2.16        |

## GENERAL

|                     |                                               |
|---------------------|-----------------------------------------------|
| Pressure Rating     | 6000 PSI                                      |
| Temperature Range   | -15°F to 400°F (-26°C to 204°C)               |
| Standard Soft Goods | [-G] Polyurethane® Packing and Viton® O-Rings |
| Cartridge Type      | Shutoff                                       |
| Connection Type     | Female Pipe Thread (NPT)                      |
| Connection Size     | 1.25"                                         |
| Body Material       | 316/L Stainless Steel, ASTM A182, UNS S31603  |
| Bonnet Material     | 316/L Stainless Steel, ASTM A276, UNS S31603  |



## OPTIONS

### [-VC] Vacuum Service

Option to add additional softgoods for internal vacuum service.

### Optional Soft Goods

[-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings