


Product Category

H809-16-SS316L

Part Description

Socketweld/braze Tube Cross Assembly

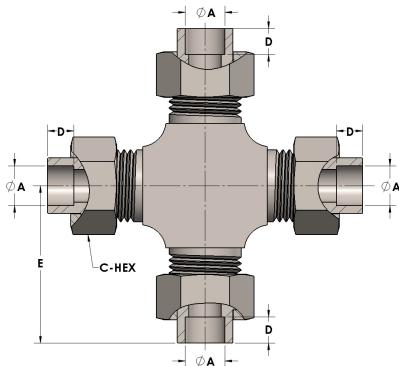

DIMENSIONS

| | |
|-------|------|
| A | 1 |
| C-HEX | 1.63 |
| D | 0.5 |
| E | 2.75 |

GENERAL

| | |
|-------------------|--|
| Pressure Rating | 4500 PSI |
| Assembly Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03 |
| O-Ring Material | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket |
| Connection 1 Size | 1" Tube O.D. (-16) |
| Connection 2 Type | Female Tube Socket |
| Connection 2 Size | 1" Tube O.D. (-16) |
| Connection 3 Type | Female Tube Socket |
| Connection 3 Size | 1" Tube O.D. (-16) |
| Connection 4 Type | Female Tube Socket |
| Connection 4 Size | 1" Tube O.D. (-16) |

<https://cpv.stage.demotesturl.net> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.