


Product Category

H810-08-08-06-M

Part Description

Socketweld/braze Tube Tee Assembly

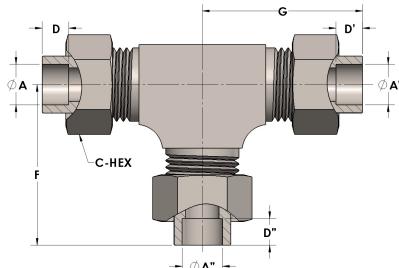

DIMENSIONS

| | |
|-------|-------|
| A | 0.500 |
| A' | 0.500 |
| A'' | 0.380 |
| C-HEX | 0.94 |
| D | 0.310 |
| D' | 0.310 |
| D'' | 0.250 |
| F | 1.69 |
| G | 1.69 |

<https://cpv.stage.demotesturl.net 484.731.4010>

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.



GENERAL

| | |
|-----------------------------|--|
| Pressure Rating | 6000 PSI |
| Tailpiece Material | Monel®, ASTM B164, UNS N04405 |
| Threadpiece Material | Monel®, ASTM B564, UNS N04400 |
| O-Ring Material | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket |
| Connection 1 Size | 1/2" Tube O.D. (-08) |
| Connection 2 Type | Female Tube Socket |
| Connection 2 Size | 1/2" Tube O.D. (-08) |
| Connection 3 Type | Female Tube Socket |
| Connection 3 Size | 3/8" Tube O.D. (-06) |