


Part Number:

H816-04-04-04-SS316L

Part Description:

Tube to Male Straight Thread Run Tee Assembly

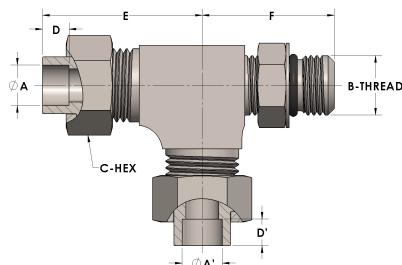

DIMENSIONS

A:	0.25
A':	0.25
B-THREAD :	.438" - 20UINF
C-HEX :	0.63
D :	0.19
D':	0.19
E:	1.19
F :	1.19

GENERAL

Pressure Rating:	6000 PSI
Assembly Material:	316/L Stainless Steel, ASTM A276, UNS S31600/03
O-Ring Material:	Viton® Fluorocarbon Type 1, Class 2 (90 durometer)
Connection 1 Type:	Female Tube Socket
Connection 1 Size:	1/4" Tube O.D. (-04)
Connection 3 Type:	Female Tube Socket
Connection 3 Size:	1/4" Tube O.D. (-04)

<http://cpv.stage.demotesturl.net 484.731.4010>

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.