


Product Category

H859-04-04-SS316L

Part Description

Tube to Male Straight Thread Union Assembly

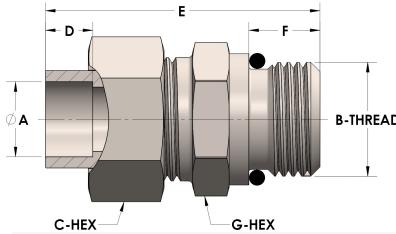

DIMENSIONS

| | |
|----------|----------------|
| A | 0.250 |
| B-THREAD | .438" - 20UINF |
| C-HEX | 0.63 |
| D | 0.190 |
| E | 1.44 |
| G-HEX | 0.63 |

GENERAL

| | |
|-------------------|--|
| Pressure Rating | 6000 PSI |
| Assembly Material | 316/L Stainless Steel, ASTM A276, UNS S31600/03 |
| O-Ring Material | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type | Female Tube Socket |
| Connection 1 Size | 1/4" Tube O.D. (-04) |
| Connection 2 Type | Male Straight Thread |
| Connection 2 Size | .438" - 20UINF (-04) |

<https://www.cpvmfg.com> 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.