

Product Category


Product Line

Part Description

480-2-P-OXNB-VC

OXNB Needle Valve (400 Series)

3/8" Globe Needle Oxygen Hand Valve

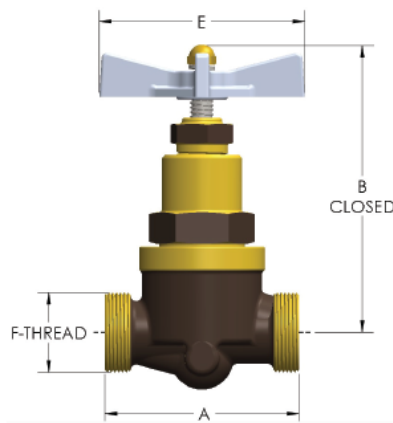

## DIMENSIONS

|           |              |
|-----------|--------------|
| Port Dia. | 0.44         |
| A         | 4            |
| B         | 4.88         |
| C         | 3.5          |
| CRN       | 0C16868.2    |
| D-THREAD  | 1.375"-12UNF |
| E         | 2.38         |
| F         | 6.25         |
| Lift      | 0.44         |
| Lift      | 0.44         |
| Lift      | 0.44         |



## GENERAL

|                     |                                   |
|---------------------|-----------------------------------|
| Pressure Rating     | 4500 PSI                          |
| Temperature Range   | -15°F to 400°F (-26°C to 204°C)   |
| Standard Soft Goods | [-C] Viton® Packing & O-Rings     |
| Cartridge Type      | Needle                            |
| Connection Type     | O-SEAL® Union Thread              |
| Connection Size     | 3/8"                              |
| Body Material       | Naval Brass, ASTM B21, UNS C46400 |
| Bonnet Material     | Naval Brass, ASTM B21, UNS C46400 |
| CRN                 | OC16868.2                         |

## OPTIONS

|                          |                                                                                                                                                |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| [-P] Port & Vent Options | [-PA] Port Above Seat (1/8" NPT), [-PB] Port Below Seat (1/8" NPT), '[-VA] Vent Above Seat (3/8"-24 SAE), [-VB] Vent Below Seat (3/8"-24 SAE), |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|