




Product Category

Part Description

H822-12-16-M

Tube to Female Pipe Thread Elbow Assembly

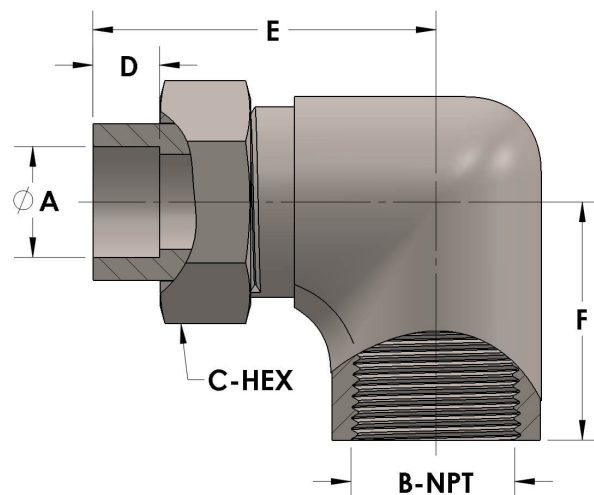

## DIMENSIONS

|       |               |
|-------|---------------|
| A     | 0.750         |
| B-NPT | 1.000" - 11.5 |
| C-HEX | 1.38          |
| D     | 0.440         |
| E     | 2.94          |
| F     | 2.19          |

## GENERAL

|                      |                                                    |
|----------------------|----------------------------------------------------|
| Pressure Rating      | 4500 PSI                                           |
| Tailpiece Material   | Monel®, ASTM B164, UNS N04405                      |
| Threadpiece Material | Monel®, ASTM B564, UNS N04400                      |
| O-Ring Material      | Viton® Fluorocarbon Type 1, Class 2 (90 durometer) |
| Connection 1 Type    | Female Tube Socket                                 |
| Connection 1 Size    | 3/4" Tube O.D. (-12)                               |
| Connection 2 Type    | Female Pipe Thread                                 |
| Connection 2 Size    | 1" NPT (-16)                                       |

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.