

**Product Category**

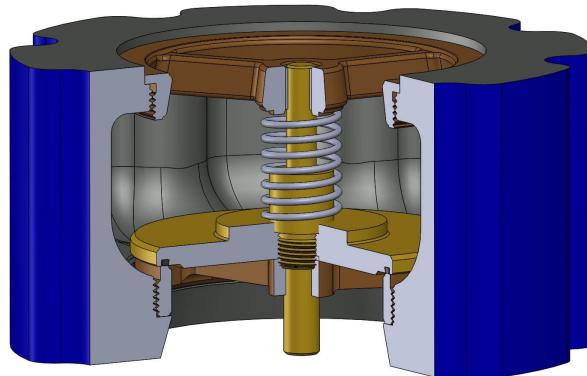
110D-F-SS-R

Product Line

Steel Flanged Check Valves (110D, 111D, 113D, 114D, 115D)

Part Description

CLASS 150 Flange Style Silent Check Valve with Steel Body and Stainless Steel Trim

**DIMENSIONS**

Face to Face	5.5
Dia. of Bolt Circle	9.50
Dia. of Flange	11.00
No. of Studs	8
Dia. of Studs	0.75
Length of Studs	10.50
Weight (lbs.)	64

GENERAL

Pressure Rating	up to 290 PSI
Temperature Range	-30°F to 250°F (-34°C to 121°C)
Standard Soft Goods	Buna-N O-Rings
Cartridge Type	Check
Connection Type	ANSI B16.5 Flange
Connection Size	6"
Body Material	Carbon Steel, ASTM A216, WCB, UNS J03002

OPTIONS

Port & Vent Options	[-DP] Drain Plug Above Seat (3/4" NPT)
--------------------------------	--

cpvmfg.com | 484.731.4010

The complete catalog contents must be reviewed to ensure that the system designer and user make a safe product selection. When selecting products, the total system design must be considered to ensure safe, trouble-free performance. Function, material compatibility, adequate ratings, proper installation, operation, and maintenance are the responsibilities of the system designer and user. Caution: Do not mix or interchange valve components with those of other manufacturers.