



Product Category


Product Line

Part Description

671-3

O-SEAL® Check Valves (600 Series)

1/2" Angle Check Valve with Welded Ends

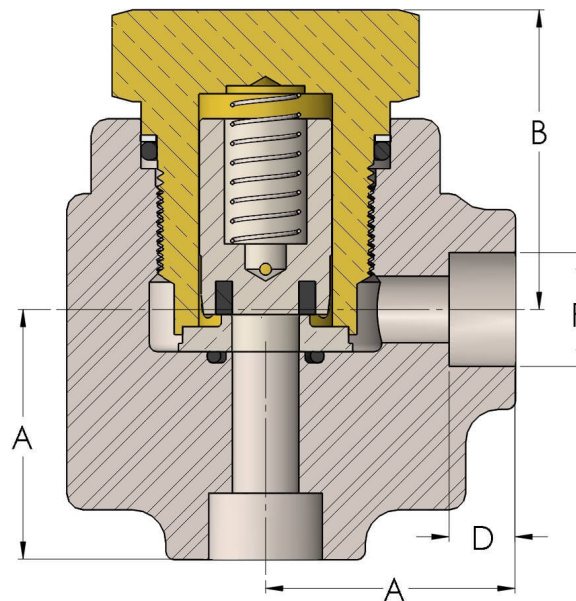

## DIMENSIONS

|               |       |
|---------------|-------|
| Port Dia.     | 0.5   |
| A             | 1.880 |
| B             | 2.69  |
| D             | 0.500 |
| F (Pipe Size) | 0.855 |
| F (Tube Size) | 0.752 |

## GENERAL

|                     |                                 |
|---------------------|---------------------------------|
| Pressure Rating     | 6000 PSI                        |
| Temperature Range   | -15°F to 275°F (-26°C to 135°C) |
| Standard Soft Goods | [-C] Viton® O-Rings             |
| Cartridge Type      | Check                           |
| Connection Type     | Socketweld                      |

|                        |   |
|------------------------|---|
| <b>Connection Size</b> | 1/2"  |
| <b>Body Material</b>   | 316/L Stainless Steel, ASTM A276, UNS S31603  |
| <b>Bonnet Material</b> | Nickel Aluminum Bronze, ASTM B150, UNS C63200 |

## OPTIONS

|                                |   |
|--------------------------------|---|
| <b>Port &amp; Vent Options</b> | [-PA] Port Above Seat (1/8" NPT), [-PB] Port Below Seat (1/8" NPT), [-VA] Vent Above Seat (3/8"-24 SAE), [-VB] Vent Below Seat (3/8"-24 SAE), |
| <b>Optional Soft Goods</b>     | [-B] Polyurethane® Packing and Buna-N O-Rings, [-C] Viton® Packing & O-Rings, [-D] EPDM Packing & O-Rings                                     |